



newline[®]
HARDSCAPES
A DIVISION OF VORBY BUILDING PRODUCTS

Installation Guide

Stoneledge[™] Fire Pit



LIVE
OUTSIDE.[®]



newline[®]
HARDSCAPES
A DIVISION OF YORK BUILDING PRODUCTS


Installation Guide

FOUNDATION

Place and compact a level base with gravel extended beyond the StoneLedge Fire Pit by at least 4 inches. The surface of the leveling pad should extend below grade by 2 inches. If you are using a concrete paver base, place the Ashland Fire Pit directly onto the base. Fill the bottom with 2-4 inches of sand for drainage.

THE FIRST LAYER OF BLOCK

Lay out the StoneLedge Fire Pit with a 30" diameter from the inside wall. Use 20 blocks per layer (13 medium, 7 small). Start each layer by setting one medium unit. Then place one small unit followed by two medium units in a repeating pattern. Adjustments to the circle of blocks may be necessary to ensure alignment as the blocks should fit tightly together. Ensure the first layer is level.

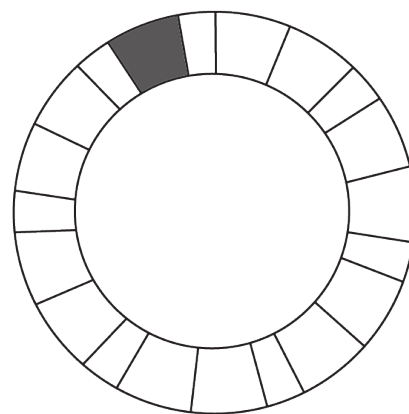

Layer 1

ADDITIONAL LAYERS

Glue the second layer of blocks above the first layer using a concrete-approved adhesive. Each layer should offset to avoid joints lining up on the block above or below.

FIRE PIT COLORS



coastal tan



fieldstone



granite



mesquite

COPING COLORS



charcoal



mocha


STONELEDGE PIT



Shown with optional coping.

Dimensions (in)	pieces	wt./pallet
50 outside dia. 30 inside dia. 17 1/2 tall	102	1740

ACCESSORIES



4-Piece Radius Coping
54 1/2" outside dia.; 29 1/2" inside dia.



Steel Insert

828 East Earl Road, New Holland, PA 17551
717.354.1200 | newlinehardscapes.com

© 2024 NewLine Hardscapes®. All Rights Reserved.